

2400 Series

FEATURES:


- .045"[1.14mm] Square wire pins
- Nylon, [UL 94V-2]
- Straight or Right angle pins

SPECIFICATIONS:

- Current rating: 7A AC. DC
- Voltage rating: 250V AC. Maximum
- Temperature range: -40°C ~ +105°C
- Contact resistance: Initial Value/10m.Ω max.
After environmental testing /20m.Ω max.
- Insulation resistance: 5000 M.Ω min
- Withstand voltage: 1500V AC/minute
- Applicable PC board thickness: .063"[1.6mm]

PIN	DIM.A	DIM.B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56

PIN	DIM.A	DIM.B
12	43.56	47.58
13	47.52	51.48
14	51.48	55.44

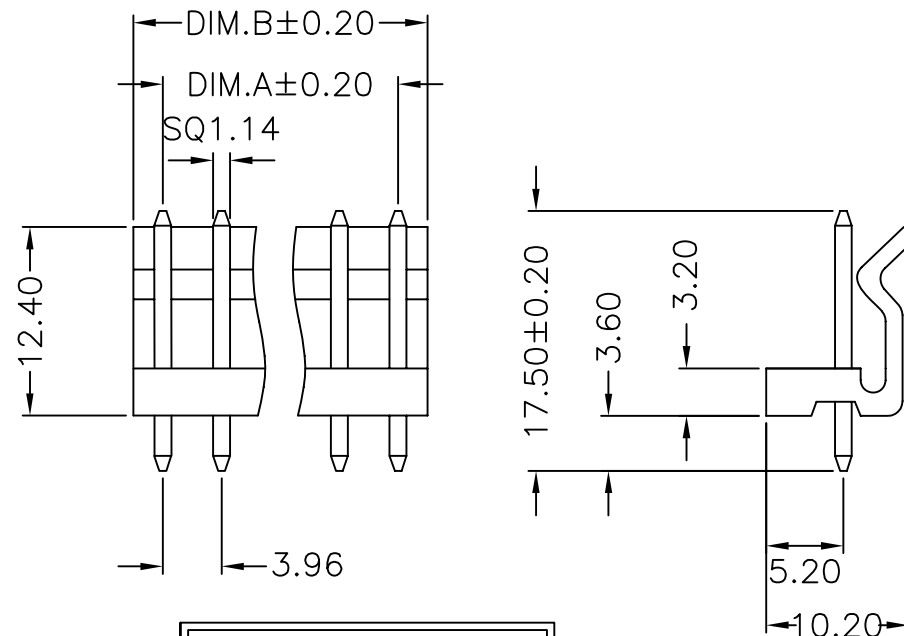

RoHS COMPLIANT

TITLE:	CUSTOMER APPROVAL	REVISION				DRAWN:	GTK UK LTD.				
P/N:		REV.	DESCR.	DATE	SIGN	CHECKED					
2400-XX-ST-R						APPROVED					
		DATE	2003.11.07	SCALE		UNIT	MM				