

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修重點尺寸標註	Daniel	王盛富	郭豐榮	98.09.30

SPECIFICATIONS

Current Rating:
2 Amp

Voltage Rating:
125V

Insulator resistance:
3000 Megohms Min.

Contact Resistance:
20 m ohms Max.

Dielectric withstanding:
AC 500V/minute

Operating Temperature:
-40° ~ +105°C

Contact Material:
Brass


Insulator Material:
Polyester UL94V-0

Standard Color:
Black




Finish:
Gold, Tin or Duplex plated
Duplex plated:
Gold plated on contact area
Tin on solder area

RoHS Compliant

檢驗重點	尺寸公差
1	2.00±0.15
2	L2±0.50
3	2.00±0.15
4	Dim.A±0.25
5	Dim.B±0.25



RECOMMENDED P. C. B. LAYOUT

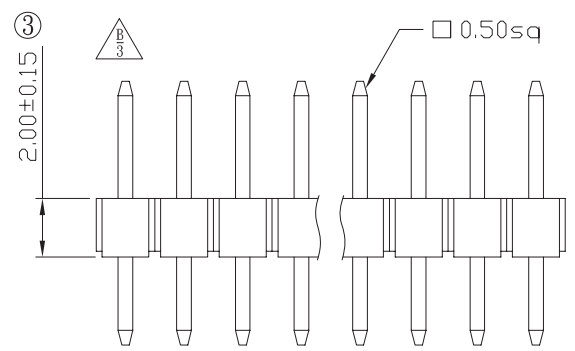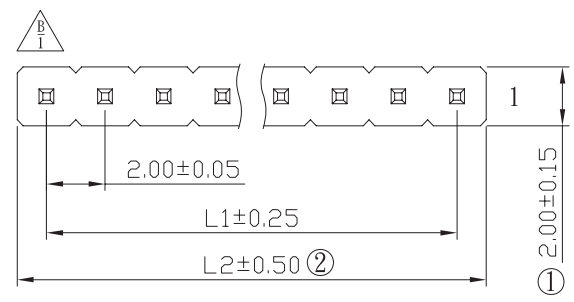

Cir-cuits	Dimension mm	
	L1	L2
2	2.00	4.00
3	4.00	6.00
4	6.00	8.00
5	8.00	10.00
6	10.00	12.00
7	12.00	14.00
8	14.00	16.00
9	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

成品規格圖				APP.		ANGLES	±3°	SIZE	A4
TITLE	2.00mm Pin Header Straight Type			CHK.		LINER	0.0 ±0.38	SCALE	4:1
PART NO	PHSSxxxG2-R						0.00±0.25	SHEET	1/1
DRWNO				DR.	康濟寶	GTK UK LTD.			
UNIT	mm(INCH)	PROJECT	◎ ◁		94.06.02				